


Modular kit

BK-20-100

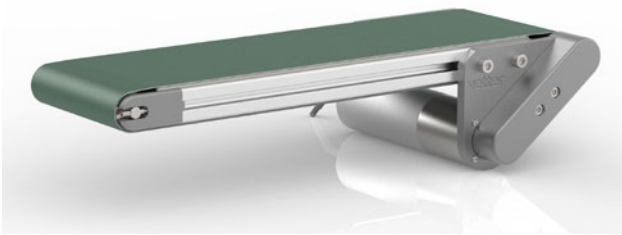

Housing height	20 mm
Housing width	100 mm
Belt width	92 mm

Centre distance	in consultation
-----------------	-----------------

Conveyor speeds / load	2 - 15 m/min at max. 40 N or 0.8 - 5 m/min at max. 100 N
Speed adjustable via analog signal 0-10 V:	
GND or 0 - 0.3 V	Programmed, fixed value
0.5 - 0.9 V	Motor stop
1 - 10 V	Speed adjustable from min. up to max.
up to 11 V	Speed increase up to 110 % of rated speed with Vetter setpoint device

Conveyor belts	white or green, FDA, antistatic
----------------	---------------------------------

Extensions	<ul style="list-style-type: none"> - sliding supports (e.g. lateral guides) - drive shaft stub - encoder-drive shaft - coupled conveyors (2-track) - coupled conveyors (multiple-track) - setpoint device VR-24-SW-11 - setpoint device VSW-11 - vacuum (perforated belt)
------------	---

Supply voltage	24 V DC
----------------	---------

