


Modular kit

BK-30-60

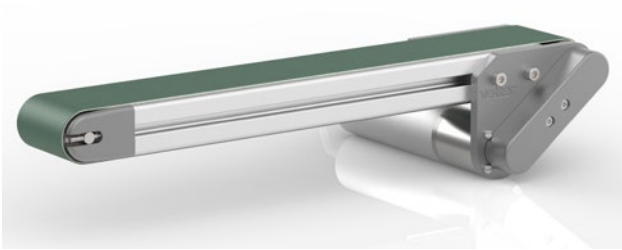

Housing height	30 mm
Housing width	60 mm
Belt width	50 mm

Centre distance	in consultation
-----------------	-----------------

Conveyor speeds / load	3 - 20 m/min at max. 30 N or 1 - 7 m/min at max. 100 N
	Speed adjustable via analog signal 0-10 V: GND or 0 - 0.3 V Programmed, fixed value 0.5 - 0.9 V Motor stop 1 - 10 V Speed adjustable from min. up to max. up to 11 V Speed increase up to 110 % of rated speed with Vetter setpoint device

Conveyor belts	green, FDA, antistatic
----------------	------------------------

Extensions	<ul style="list-style-type: none">- sliding supports (e.g. lateral guides)- knife edge (other belt)- drive shaft stub- encoder-drive shaft- coupled conveyors (2-track)- coupled conveyors (multiple-track)- setpoint device VR-24-SW-11- setpoint device VSW-11- vacuum (perforated belt)
------------	--

Supply voltage	24 V DC
----------------	---------