

Transmitted light

FR-20-40-DL



Further information

- Dimensions transmitted light field: 30 x 30 mm
- Colour: White
- Colour temperature: 5,000 K
- Operation as continuous light
- Lighting duration can be controlled via a trigger signal, max. 10 ms
- Lighting intensity can be dimmed via analog signal 0–10 V DC
- Supply voltage / current input transmitted light: 24 V DC (18–30 V DC) / 0,1 A

Housing height	20 mm
Housing width	40 mm
Belt width	32 mm

Centre distance	In mm (available at short notice): 350, 400, 450, 500, 600, 700, 800, 900, 1,000 Custom centre distances on request
-----------------	---


Conveyor speeds / load	2–8 m/min at max. 5 N or 0.7–3 m/min at max. 15 N
------------------------	--

Speed controller integrated and easy to set by means of +/- keys or via external analogue signal 0–10 V.


Conveyor belts	Translucent, FDA
----------------	------------------

Supply voltage	24 V DC
----------------	---------

Variant 1

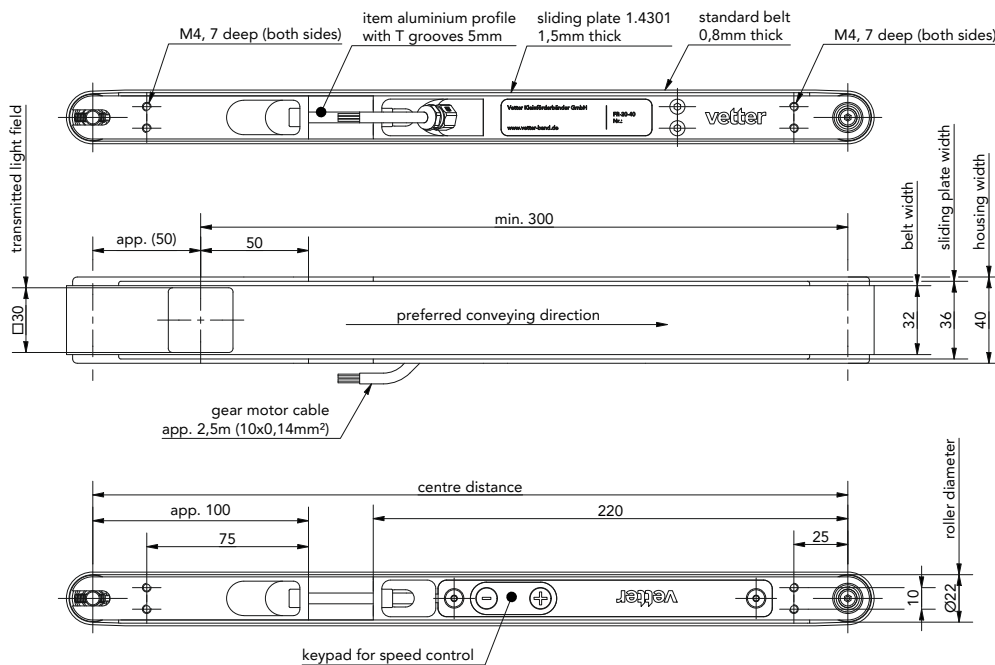

Variant 2

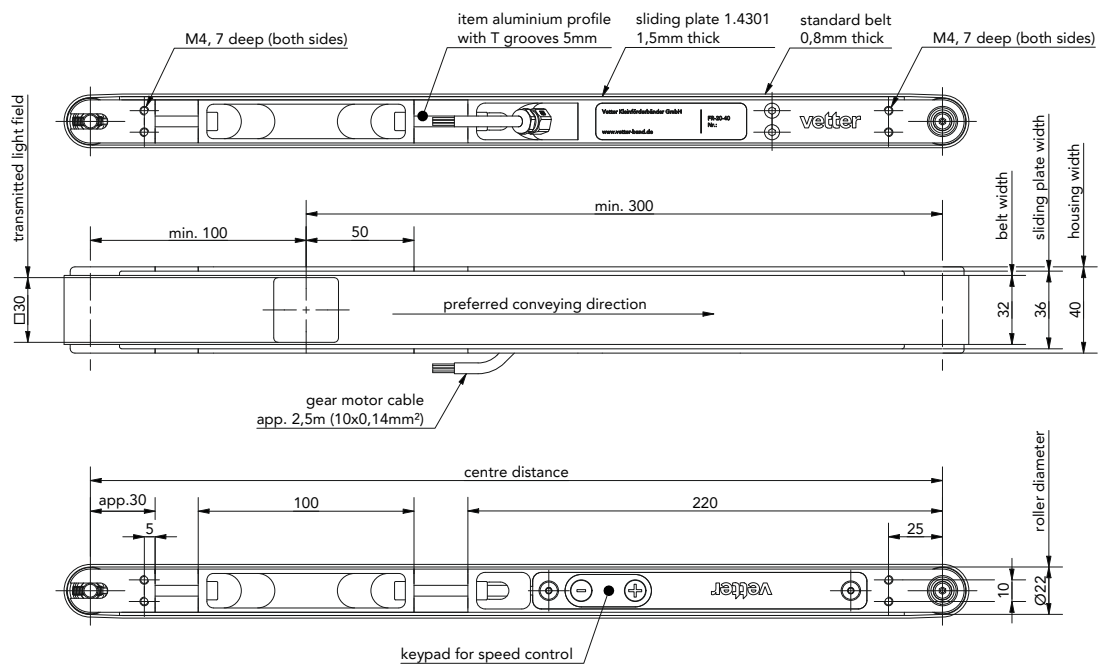

Extensions

