

Housing height	20 mm
Housing width	40 mm
Belt width	32 mm

Internal drive

FR-20-40

Centre distance	In mm (available at short notice): 300, 350, 400, 450, 500, 600, 700, 800, 900, 1,000 Custom centre distances on request
-----------------	---


Conveyor speeds / load	2–8 m/min at max. 5 N or 0.7–3 m/min at max. 15 N Speed controller integrated and easy to set by means of +/- keys or via external analogue signal 0–10 V.
------------------------	--

Conveyor belts	White, FDA, antistatic (others available on request)
----------------	---

Supply voltage	24 V DC
----------------	---------



Connection and
commissioning

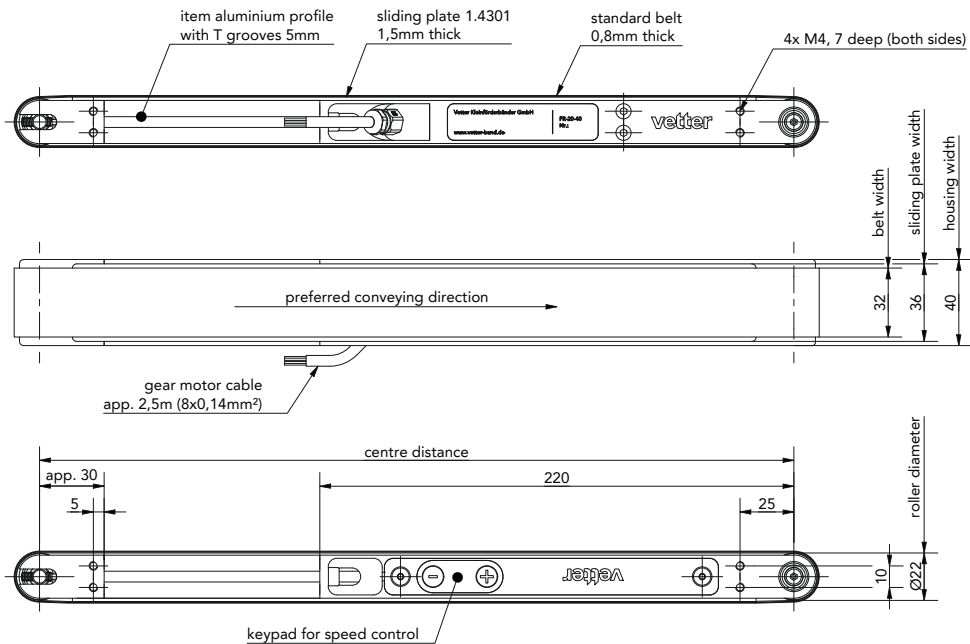

Extensions

