Internal drive

# FR-40-120

| | |
|---|---|
| Housing height | 40 mm |
| Housing width | 120 mm |
| Belt width | 105 mm |

| | |
|---|---|
| Centre distance | in mm (available at short notice):<br>350, 400, 450, 500, 600, 700, 800, 900, 1,000, 1,200, 1,400, 1,600<br>Custom centre distances on request |
| Conveyor speeds / load | 2 - 10 m/min at max. 50 N or<br>0.5 - 3 m/min at max. 100 N<br><br>Speed adjustable via analog signal 0-10 V:<br>GND or 0 - 0.3 V — Programmed, fixed value<br>0.5 - 0.9 V — Motor stop<br>1 - 10 V — Speed adjustable from min. up to max.<br>up to 11 V — Speed increase up to 110 % of rated speed with Vetter setpoint device |
| Conveyor belts | green, FDA, antistatic (others available on request) |
| Extensions | - sliding supports (e.g. lateral guides)<br>- knife edge (other belt)<br>- drive shaft stub<br>- encoder-drive shaft<br>- coupled conveyors (2-track)<br>- setpoint device VR-24-SW-11<br>- setpoint device VSW-11 |
| Supply voltage | 24 V DC |

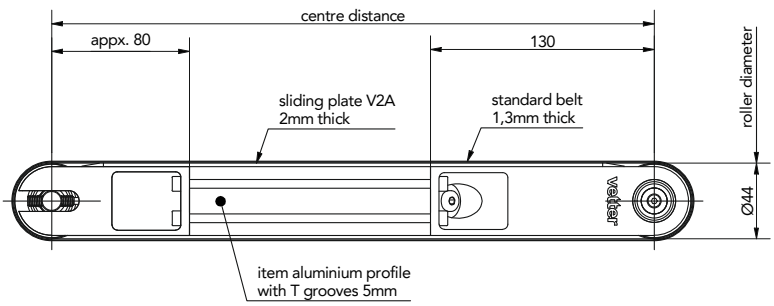


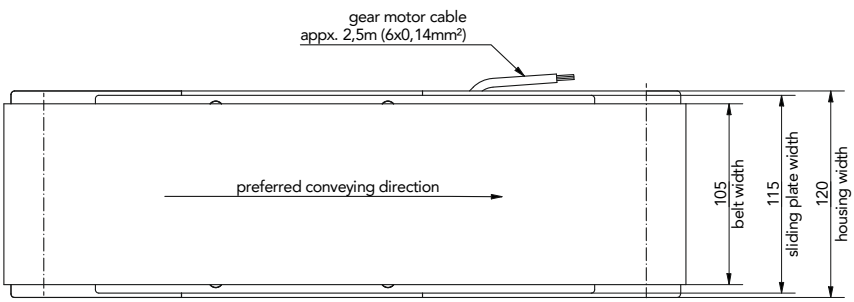


© Vetter Kleinförderbänder GmbH · We reserve the right to modifications · Version 01.2020
www.vetter-band.de · info@vetter-band.de