

Transmitted light

FR-40-160-Q-DL



Further information


- Dimensions transmitted light field: 140 x 140 mm
- Colour: White
- Colour temperature: 5,000 K
- Operation as continuous light
- Lighting duration can be controlled via a trigger signal, max. 10 ms
- Lighting intensity can be dimmed via analogue signal 0–10 V DC
- Supply voltage / current input transmitted light: 24 V DC (18–30 V DC) / 1.23 A

Housing height	40 mm
Housing width	160 mm
Belt width	145 mm

Centre distance	In mm (available at short notice): 500, 600, 700, 800, 900, 1,000, 1,200, 1,400, 1,600 Custom centre distances on request
-----------------	--

Conveyor speeds / load	5–30 m/min at max. 20 N or 4–24 m/min at max. 40 N or 1.5–10 m/min at max. 100 N
	Speed adjustable via analogue signal 0–10 V: GND or 0–0.3 V Programmed, fixed value 0.5–0.9 V Motor stop 1–10 V Speed adjustable from min. up to max. Up to 11 V Speed increase up to 110 % of rated speed with Vetter setpoint device

Conveyor belts	Translucent, FDA
Supply voltage	24 V DC

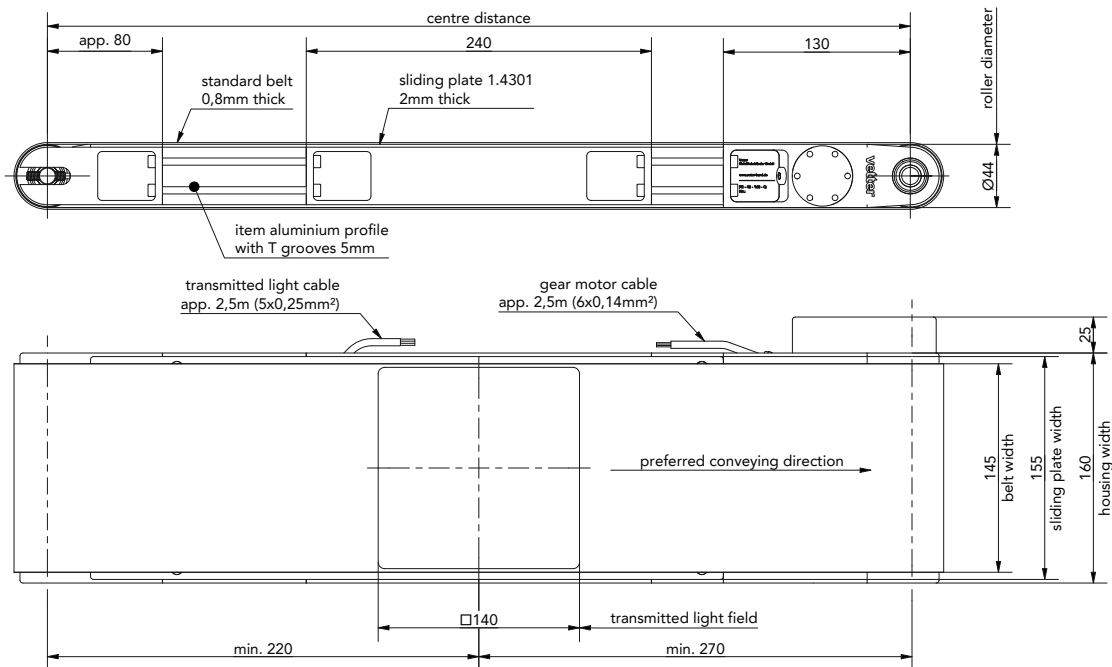

Extensions

