

# Transverse drive

## FR-40-160-Q

Housing height	40 mm
Housing width	160 mm
Belt width	145 mm




Connection and commissioning

Centre distance	In mm (available at short notice): 300, 350, 400, 450, 500, 600, 700, 800, 900, 1,000, 1,200, 1,400, 1,600 Custom centre distances on request
-----------------	--

Conveyor speeds / load	5–30 m/min at max. 20 N or 4–24 m/min at max. 40 N or 1.5–10 m/min at max. 100 N
Speed adjustable via analogue signal 0–10 V:	GND or 0–0.3 V Programmed, fixed value 0.5–0.9 V Motor stop 1–10 V Speed adjustable from min. up to max.
Up to 11 V	Speed increase up to 110 % of rated speed with Vetter setpoint device

Conveyor belts	Green, FDA, antistatic (others available on request)
Supply voltage	24 V DC

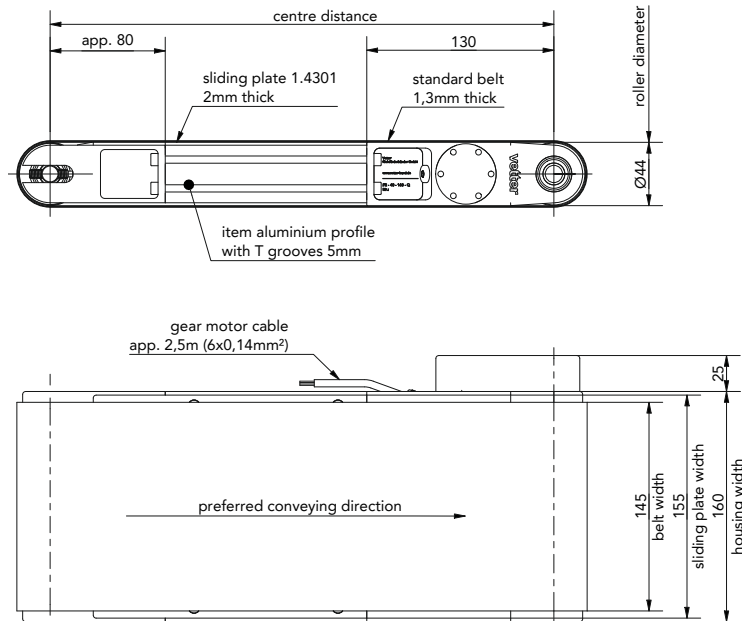

### Extensions

